

E2SS-32R2

2.5" to Dual M.2 RAID Module



HIGHLIGHT FEATURES

- Supports SATA to dual SATA III port multiplier
- Supports H/W RAID 0/1 over SATA
- Pin header for LED connection
- 3-year warranty
- Industrial design, manufactured in Innodisk Taiwan


SPECIFICATIONS

Model Name	E2SS-32R2
Module Type	2.5" to Dual M.2 RAID Module
Form Factor	2.5" SSD
Function	Disk Array
Input I/F	SATA III
Output I/F	SATA III
Output Port	2
Output Connector	M.2 B Key 2242 / M.2 B Key 2260 / M.2 B Key 2280
Max. Power Consumption	4W (5V, 800mA)
Dimension (W x L x H/mm)	69.85 x 100 x 9.5
Temperature	Operation : S/T 0° ~ 70°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	--
Warranty	3 Years
Notes	1. RAID Mode Setting : [J1 : J2] RAID0_2 : 2, RAID1_1 : 2, PM_1 : 1 2. Press tact switch SW1 for reset.

ORDER INFO.

P/N	Description
E2SS-32R2-C1	2.5" to Dual M.2 RAID Module / Standard Temperature

MECHANICAL DRAWING

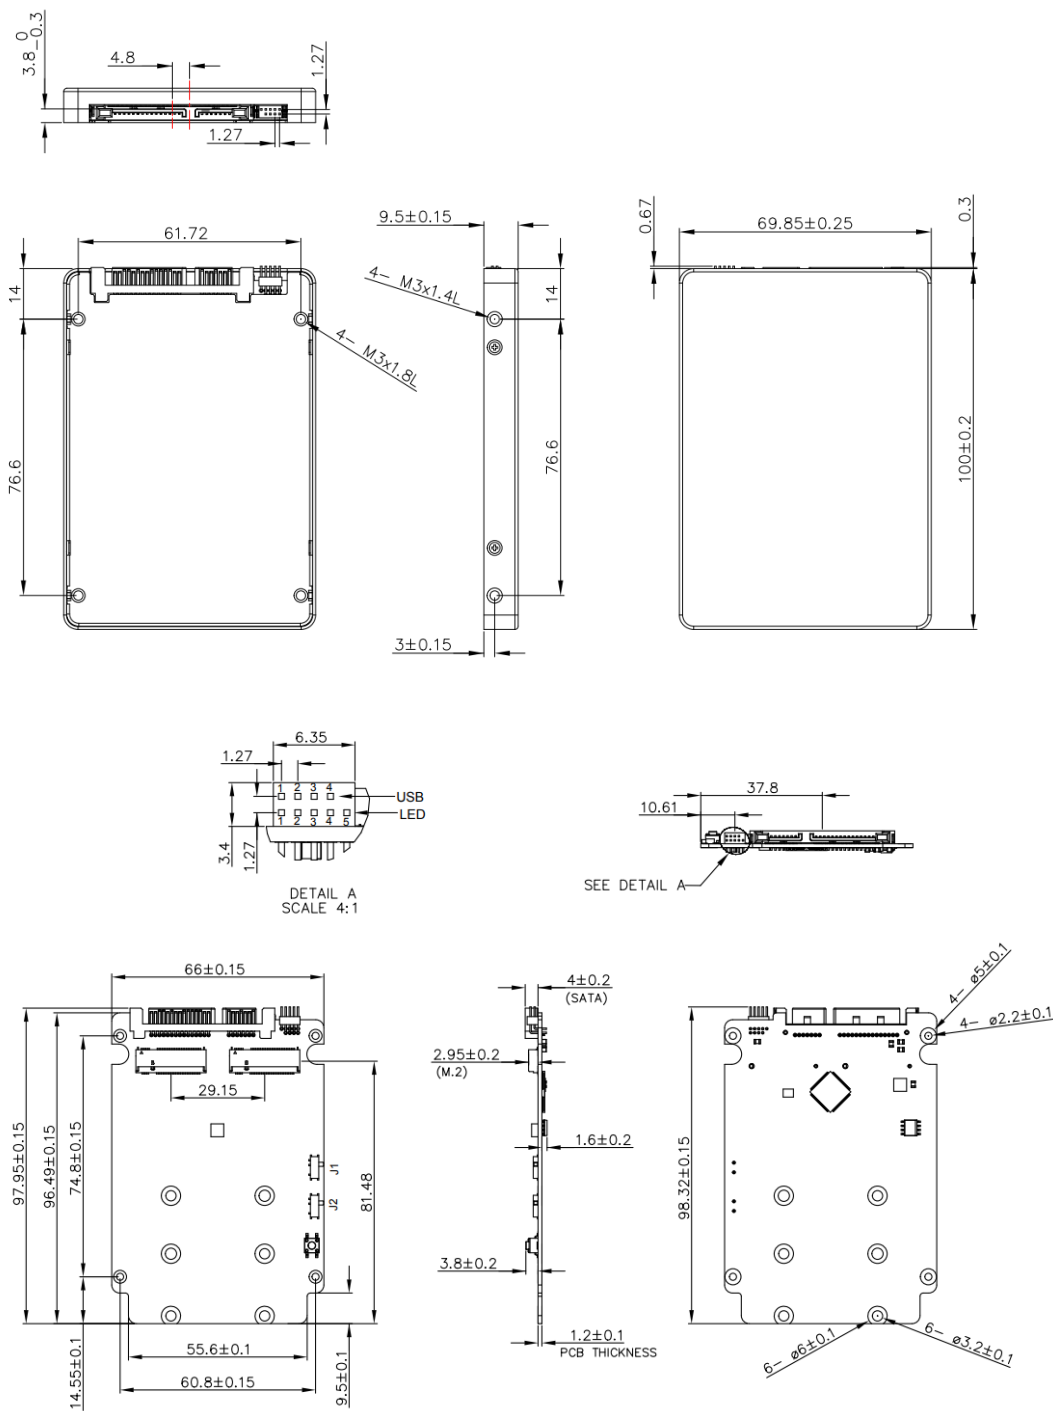

LED	Pin	USB 2.0
GDN	1	GND
CON2 Error	2	D+
CON2 Access	3	D-
CON1 Error	4	5V
CON1 Access	5	

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com
CN T +86-755-2167-3689 / E sales_cn@innodisk.com
US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com
JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk