



EMXX-0101

mPCIe to M.2 A+E Key Module

HIGHLIGHT FEATURES

- Compliant with PCI Express Base Specification
- Compliant with Universal Serial Bus 2.0 Specification
- Supports M.2 A+E Key wireless module such as 3G, 4G, WLAN, WWAN, Bluetooth
- Supports M.2 2230 / 2242 form factor
- Supports M.2 PCIe Lane 0 & Lane 1 by pin header setting
- Supports operating temperature from -40°C to 85°C

SPECIFICATIONS


Model Name	EMXX-0101
Module Type	mPCIe to M.2 A+E Key Module
Form Factor	mPCIe
Function	Testing Tool
Input I/F	PCI Express 1.0 x1 / USB 2.0
Output I/F	PCI Express / USB 2.0
Output Port	1
Output Connector	M.2 A+E Key
Max. Power Consumption	--
Dimension (W x L x H/mm)	30 x 54.4 x 8.15
Temperature	Operation : W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	--
Warranty	3 Years
Notes	--

ORDER INFO.


P/N	Description
EMXX-0101-W1	mPCIe to M.2 A Key Module / Wide Temperature
EMXX-0101-W2	mPCIe to M.2 E Key Module / Wide Temperature

MECHANICAL DRAWING

EMXX-0101-W1

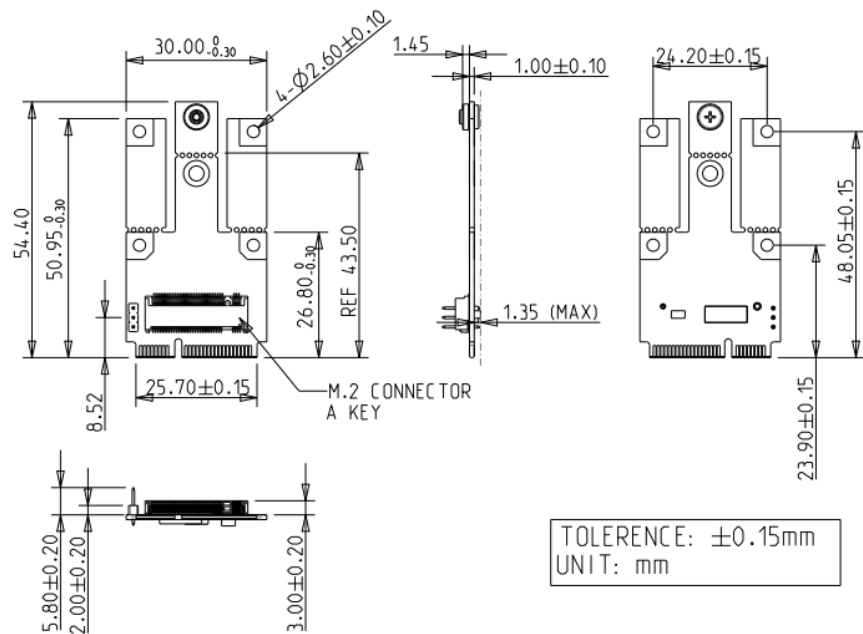

EMXX-0101-W2

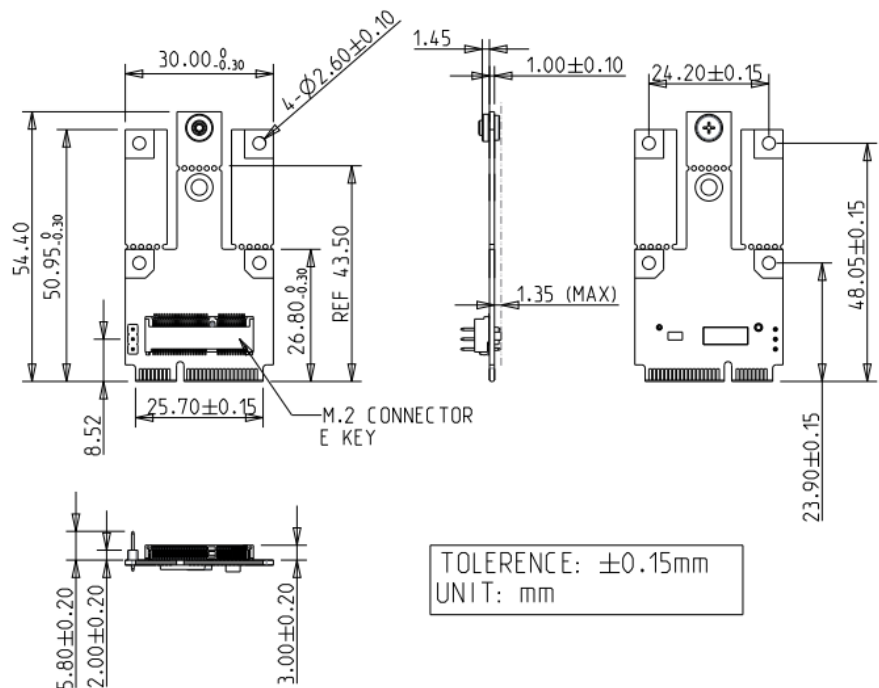

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk