

M.2 (P80) 3TE8

HIGHLIGHT FEATURES




- PCIe Gen 3 x2, NVMe SSD
- Kioxia 3D TLC NAND
- Standard temperature
- iData Guard
- Dynamic thermal management
- Hybrid write mode with SLC cache enable
- Support TCG Opal function

SPECIFICATIONS

Model Name	M.2 (P80) 3TE8
Flash Type	3D TLC
Interface	PCIe Gen 3 x2
Form Factor	M.2 2280 B+M key
Capacity	128GB ~ 2TB
Sequential R / W (MB/sec, max.)	1,750 / 1,650
P/E Cycle	3,000
TBW (Max.)	2,304
Storage Temperature	-40°C ~ 85°C
Max. Power Consumption	3.0W
Max. Channels	4
External DRAM Buffer	N
H/W Write Protect	N
S.M.A.R.T.	Y
AES	Y
TCG Opal	Y
Dimension (W x L x H/mm)	22.0 x 80.0 x 2.15
Vibration	20G@7~2000Hz
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	3 Years

DIAGRAM

ST

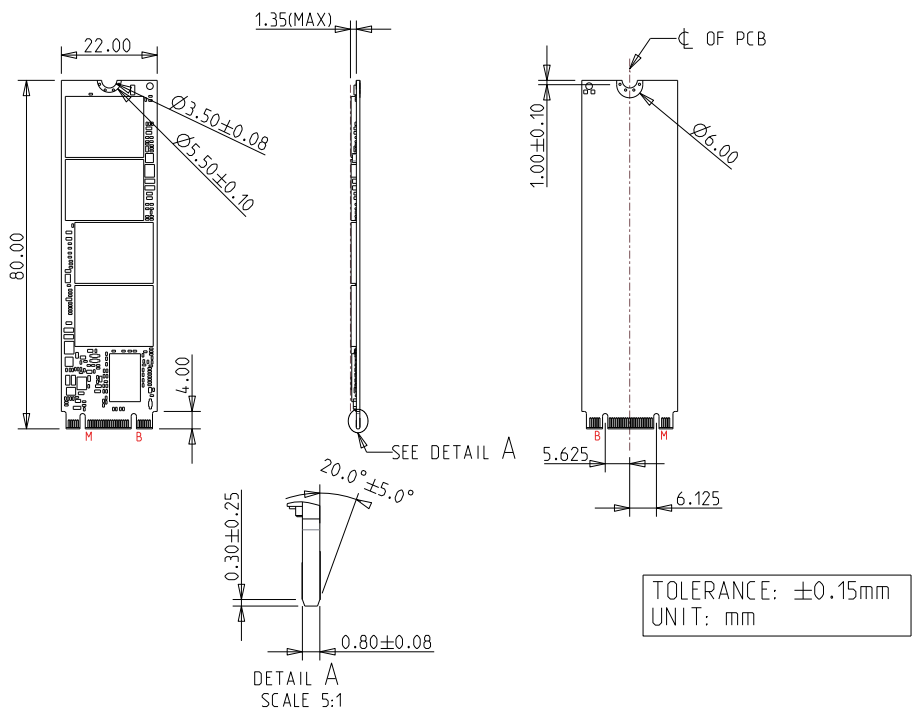

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)
128GB	DEM28-A28DS2KCCDFS
256GB	DEM28-B56DS2KCCQFS
512GB	DEM28-C12DS2KCCQFS
1TB	DEM28-01TDS2KCCQFS
2TB	DEM28-02TDS2KCCQFS

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

